



TECHNICAL DATA / FEATURES

- dimensions: 154x92x68, 184x102x68
- luminous flux of the LED module: 3000 lm
- luminous flux of the lamp: 2400 lm
- maximum power: 40W
- nominal voltage: 12V-24V DC
- permissible power supply voltage: 10.5V-30V DC
- source of light: 6 x LED
- colour temperature: 5000-7000K
- light distribution angle: 63° x 45°
- IP rating: IP67, IP69K
- work temperature: -40°C - +80°C
- housing's material: aluminium
- lens' material: plastic
- built-in connectors: -
- other: protection:
 - against overheating
 - against reverse polarisation



ADDITIONAL INFORMATION

Work lamps are used to illuminate working space near vehicles, tractors, slow-moving machines and any other places where indicated voltage is available.

The lamps comply with EMC Directive 2004/108/EC. They do not emit electromagnetic interference as well as they are resistant to it's influence.

Correct polarity required.

Mounting: factory prepared places, built-in to vehicle's recess.

Equipped with a Combo-type optical system, which combines a wide and spot beam pattern.

CRP2A products are LED replacements for halogen LPR8 lights.

Dedicated application:



A - tractors:

- Case IH serie CS
- Deutz serie Agrostar
- Fendt series: Farmer, Favorit, GT, Vario, Xylon
- Massey Ferguson series: 4200, 4300, 6100, 6200, 8100, 8200
- Steyr series: 900, 8000, 9000

- agricultural harvesters:

- Case IH serie CF
- Claas series: Lexion, Medion
- Sampo serie SR

DIMENSIONS

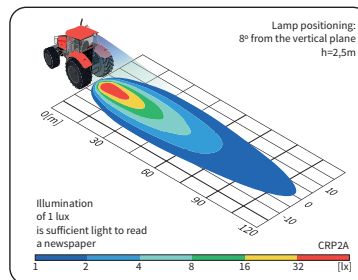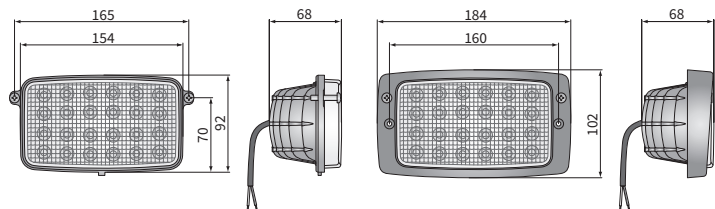

Cat. number	Luminous flux	Rated power	IP rating	Accessories	Connectors	Application
CRP2A.55300	3000 lm	40W	IP67	LED module 12V/24V LED module 48V cable 0.5 m cable 8 m frame	Deutsch DT AMP SuperSeal 1,5 Cap / Pin	dedicated
CRP2A.55350	✓	✓	✓	✓	✓	A